

V-


**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231  
Архангельск (8182)63-90-72  
Астрахань (8512)99-46-04  
Барнаул (3852)73-04-60  
Белгород (4722)40-23-64  
Брянск (4832)59-03-52  
Владивосток (423)249-28-31  
Волгоград (844)278-03-48  
Вологда (8172)26-41-59  
Воронеж (473)204-51-73  
Екатеринбург (343)384-55-89  
Иваново (4932)77-34-06  
Ижевск (3412)26-03-58  
Иркутск (395)279-98-46  
Россия (495)268-04-70


Казань (843)206-01-48  
Калининград (4012)72-03-81  
Калуга (4842)92-23-67  
Кемерово (3842)65-04-62  
Киров (8332)68-02-04  
Краснодар (861)203-40-90  
Красноярск (391)204-63-61  
Курск (4712)77-13-04  
Липецк (4742)52-20-81  
Магнитогорск (3519)55-03-13  
Москва (495)268-04-70  
Мурманск (8152)59-64-93  
Набережные Челны (8552)20-53-41  
Нижний Новгород (831)429-08-12  
Киргизия (996)312-96-26-47

Новокузнецк (3843)20-46-81  
Новосибирск (383)227-86-73  
Омск (3812)21-46-40  
Орел (4862)44-53-42  
Оренбург (3532)37-68-04  
Пенза (8412)22-31-16  
Пермь (342)205-81-47  
Ростов-на-Дону (863)308-18-15  
Рязань (4912)46-61-64  
Самара (846)206-03-16  
Санкт-Петербург (812)309-46-40  
Саратов (845)249-38-78  
Севастополь (8692)22-31-93  
Симферополь (3652)67-13-56  
Казахстан (7172)727-132

Смоленск (4812)29-41-54  
Сочи (862)225-72-31  
Ставрополь (8652)20-65-13  
Сургут (3462)77-98-35  
Тверь (4822)63-31-35  
Томск (3822)98-41-53  
Тула (4872)74-02-29  
Тюмень (3452)66-21-18  
Ульяновск (8422)24-23-59  
Уфа (347)229-48-12  
Хабаровск (4212)92-98-04  
Челябинск (351)202-03-61  
Череповец (8202)49-02-64  
Ярославль (4852)69-52-93

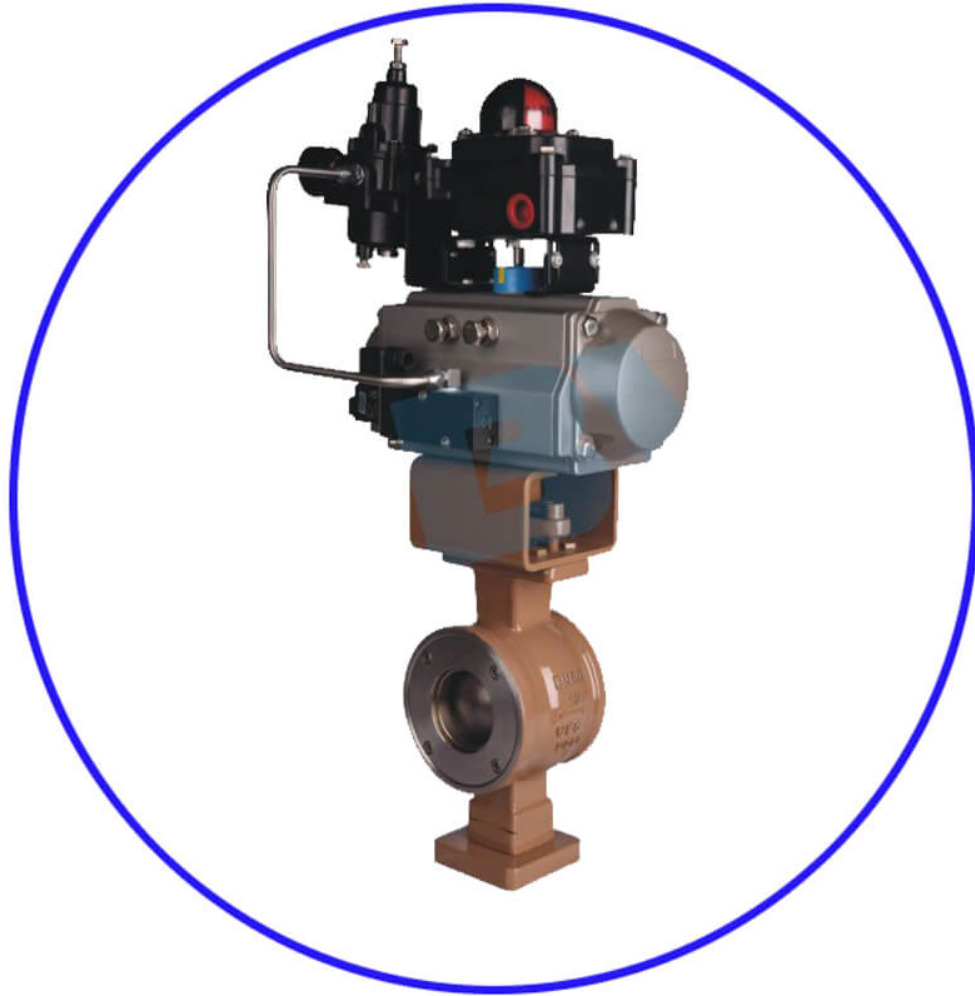

# V type Ball Valves

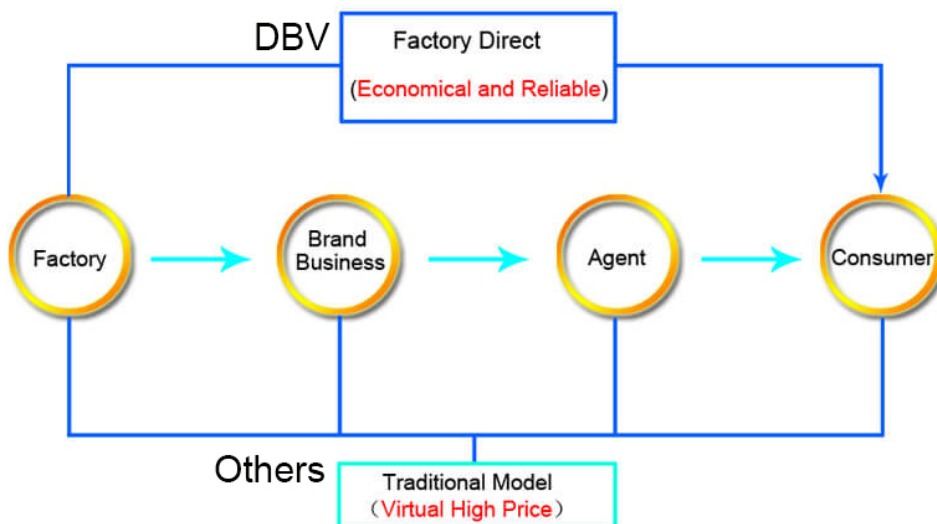

## V Type Ball Valves:

Nominal Diameter(mm):25、32、40、50、65、80、100、125、150、200、250、300、350、400、450、500、600

Nominal Pressure rating: 1.0、1.6、2.5、4.0、6.4(MPa) ANSI 150LB、300LB。

Connection Type:Wafer connection for SN25~250,flanged connection for DN25-600.

Working temperature:-20-160℃(Normal Temp.)-20-230℃(Medium Temp),-20-450℃(High Temp).

Pressure test:Each DBV valve undergoes hydraulic test with 1.5X pressure rating as shell test pressure and 1.0X pressure rating as tightness test pressure. Testing medium is water.

Leakage:V notch ball valve with maximum allowable leakage as following ,equal to 2% of maximum leakage of ANSI/FCL70.2 Class IV.

## V Type Ball Valves:

### 1. Application:

V notch ball valve is quarter turn control valve mainly recommended for throttle service, but it is also applicable for switch valve. V type ball is in V-notch design with strong cutting force and self-cleanness, especially suitable for control of medium containing fibre and tiny solids. Therefore, it is widely used in the self-control systems in industries such as paper, petrochemistry, petroleum, chemical fibre, power, metallurgy, pharmacy, environmental protection, etc.

### 2. Spring Loaded Valve Seat:

Pre-tightened loaded seat keeps valve seat and ball in constant close contact, therefore, good sealing performance is assured even at a long differential pressure with greatly extended service life. PTFE soft seat and metal seat are available for different media and temperature.

### 3. One-piece Valve Body

One-pcs valve body prevents potential leakage patch caused by flange connection.

### 4. V-notch Ball and Automatic Sliding Bearings:

Specially designed V-notch ball provides equal percentage flow characteristic with high precision control performance as well as strong cutting force and self-cleaning function. Upper and lower shaft are fixed by double bearings with good stability. Bearings are in composite material, and loaded surfaces are sintered with superior abrasion resistant and self-lubricating function, which prevents valve seizing up during service life.

### 5. Spline Connection Between Shaft and Ball

Ball and shaft are connected by spline, which keeps good neutral position with large load bearing capacity and long service life. It also eliminates the room between the stem and ball, and the dead band phenomenon is prevented with enhanced control precision.

### 6. Low Capacity

For customers' flow applications, low capacity valves are available with DN25 for precise control. Non-standard flanges are needed for connection with DN20 and DN15 pipe.

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	